




# Model 44D

## AUDIO INTERFACE

### Configuration Guide

This Configuration Guide is applicable for the following serial numbers: M44D-01151 and later with application firmware 1.2 and later and Dante firmware 2.0 (Ultimo 3.10.1.12) and later

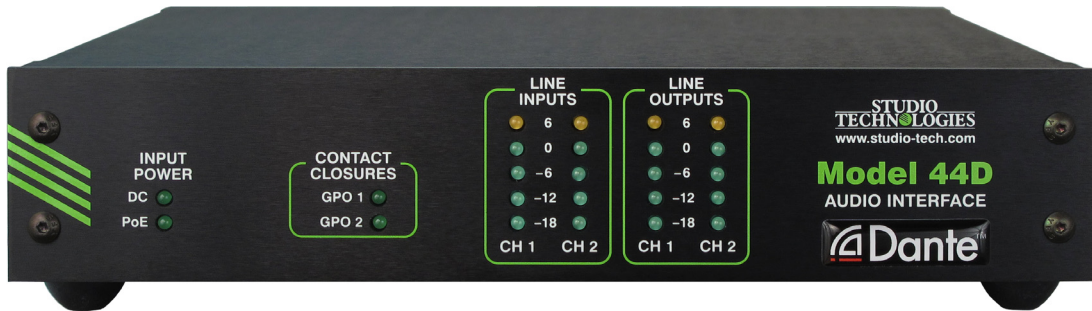

### SW1 – Analog Inputs Maximum Level



+24 dBu = 0 dBFS



+18 dBu = 0 dBFS

### SW2 – Analog Outputs Maximum Level



0 dBFS = +24 dBu



0 dBFS = +18 dBu

### SW3 – 10 kHz Low-Pass Filter



Disabled



Enabled

### SW4 – Spare (Not Used)

