




Model 5120 Line/IFB Output Module

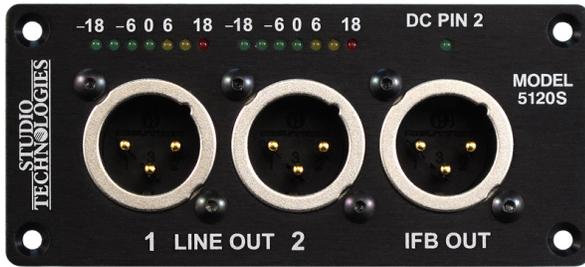

Model 5120S Line/IFB Output Module Front Panel

The Model 5120 Line/IFB Output Module is a compact, self-contained 2-channel module intended for use in custom broadcast, live-performance, and other specialized audio applications. The module provides broadcast and production talent cueing interfaces, specifically two line-level (“dry”) and one IFB (“wet”) outputs, in an easy-to-use yet technically sophisticated package. (Note that IFB is an acronym for Interrupted Fold Back, an arcane broadcast technical term meaning the cue signals sent to on-air talent or other technical support personnel.) The module’s basic functions include analog and digital audio inputs, input level and status LED indicators, two analog line-level outputs, and a 2-channel DC-biased (“wet”) broadcast-standard IFB output. Module operation requires only a source of analog or digital audio, along with an externally-provided source of 12 volts DC.

Applications for the Model 5120 include sports broadcasting booth packages, remote news gathering “fly-packs,” stadium audio/video interface (I/O) locations, and other broadcast-infrastructure projects. The number of Model 5120 modules used in a project can vary widely—from one to dozens. In each case the Model 5120’s performance will be completely “pro” with audio quality, reliability, and installation flexibility matching that of larger-scale audio consoles, matrix intercom systems, and stand-alone IFB systems.

Typical applications will find the Model 5120’s analog and digital audio inputs being interfaced with outputs provided by fiber-optic transport modules, audio/video routers, broadcast/production consoles, and matrix intercom systems. Only one of the audio inputs, analog or digital, will be used at any one time. No mixing of the signals will take place. While both physical inputs can be connected, the digital audio input will always take precedence. Under processor control the digital audio input will always serve as the Model 5120’s audio source should it be present and “locked” to the input circuitry. The analog audio input will be active whenever a digital audio signal is not present and “locked.”

The Model 5120’s line-level outputs would typically be connected to battery-powered listen-only headphone amplifiers, amplified speakers, or inputs on broadcast media storage systems. In remote-broadcast applications these two outputs may be referred to as “dry” (no DC voltage present) IFB signals. The Model 5120’s IFB output is directly compatible with listen-only portable IFB amplifiers, such as the Models 32A, 33A, or 34A from Studio Technologies, Inc. The 2-channel IFB output provides signal common on one pin, +28 volt DC power with superimposed analog audio on a second pin, and analog audio only on a third pin. This complies with a long-popular broadcast-standard implementation.

Model 5120 Line/IFB Output Modules do not include a mounting enclosure or chassis. They are intended for mounting in custom 19-inch rack panels, equipment boxes, broadcast furniture, or other specialized settings. It is expected that integration firms will create applications that use Model 5120 modules as part of complete broadcast, production, corporate, and government solutions.

Separate audio inputs are provided for interfacing with analog and digital audio sources. The two analog inputs are balanced and compatible with line-level signals. An unbalanced AES3 digital audio input allows the connection of two audio channels. Input source selection is automatic. If an AES3 digital audio source is connected it will have priority. Two 7-segment LED meters provide the user with an indication of the input levels.

The Model 5120’s audio performance is very good. Low-noise, wide dynamic-range circuitry ensures that the input audio quality is preserved. The audio from the digital audio input is routed to a high-performance digital-to-analog conversion (DAC) section that supports sample rates of up to 48 kHz with a bit depth of up to 24. The outputs of the analog inputs or DAC circuitry are routed to two line-level analog audio output sections. These provide the line-level, balanced (differential), ESD-protected, capacitor-coupled output signals.


The two analog signals from the selected input channels are also routed to the IFB circuitry. One channel is used to modulate the DC power source circuitry. The second channel is routed to a single-ended (unbalanced) line-driver circuit. The IFB power source circuitry provides a low-noise, current-limited source with a nominal 28 volt DC output. This is essentially identical to that created by “big time” broadcast IFB systems. Logic circuitry contained within the Model 5120 monitors the DC output voltage.

Should a low-voltage/over-current condition be detected the DC output enters a protection mode. Once the fault condition is removed normal operation will again resume. An LED, located on the Model 5120's front panel, provides an indication of the IFB output's status. Note that for additional flexibility, the source impedance of both IFB output channels is 200 ohms, allowing intercom "beltpacks" to also serve as listen-only devices.

All audio inputs and outputs were carefully designed for use in permanent as well as field applications. Filtering on the inputs minimizes the chance that radio frequency (RF) energy will interfere with audio input sources. Other components were included to address ESD ("static") and DC over-voltage conditions. The DC power input is protected from accidental polarity reversal.

The Model 5120 requires an external source of nominal 12 volts DC for operation. The acceptable input voltage range is 10 to 18 allowing a variety of power sources to be utilized. Internal power supply circuitry within the Model 5120 creates the voltages required for the analog audio, digital audio, and IFB circuitry.

Standard connectors are used throughout the Model 5120. Line-level and IFB output connections are made using 3-pin male XLR connectors. The two analog audio inputs use a 5-position, 0.1-inch "header" connector. A DIN 1.0/2.3 coaxial connector is used to

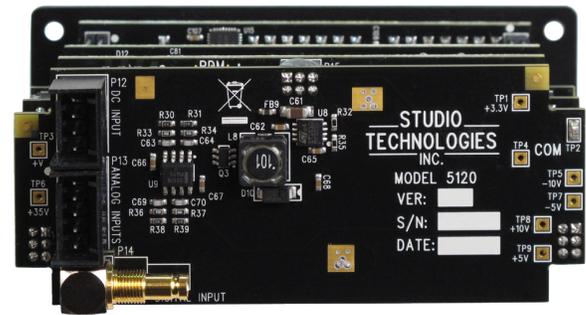

Model 5120 Line/IFB Output Module Back View

interface with the digital audio input. The DC power input connections use a 4-position, 0.1-inch header. Low-cost IDC (insulation displacement) mating connectors allow simple interconnection with the analog audio inputs and DC power signals.

For compliance with international broadcast audio level standards two versions of the Model 5120 are available. The Model 5120S supports SMPTE® audio levels where the analog audio reference level is +4 dBu and the digital audio reference level is -20 dBFS (SMPTE RP155). The Model 5120E supports applications that require European Broadcast Union (EBU) compliance with an analog audio reference level of 0 dBu and a digital audio reference level of -18 dBFS (EBU R68).

Model 5120 Specifications

Digital Audio Input: 1 (2-channel)

Type: AES3, unbalanced, 75 ohms

Maximum Sample Rate/Bit Depth: 48 kHz/24

Nominal Level: -20 dBFS (Model 5120S); -18 dBFS (Model 5120E)

Analog Audio Inputs: 2

Type: electronically balanced, capacitor-coupled, 20 k ohms

Nominal Level: +4 dBu (Model 5120S), 0 dBu (Model 5120E)

Maximum Level: +24 dBu

Analog Inputs to Line Outputs:

THD+N: 0.005% (-86 dB), +4 dBu input, 1 kHz

Frequency Response: ±2 dB, 20 Hz to 20 kHz

Signal-to-Noise Ratio (A Weighted): 93 dB

Dynamic Range: 113 dB

Crosstalk: 105 dB, +23 dBu in, 1 kHz and 10 kHz

Digital Inputs to Line Outputs:

THD+N: 0.022% (-73 dB), +4 dBu input, 1 kHz

Frequency Response: ±1 dB, 20 Hz to 20 kHz

Signal-to-Noise Ratio (A Weighted): 82 dB

Dynamic Range: 102 dB

Crosstalk: 98 dB, -1 dBFS in, 1 kHz; 91 dB, -1 dBFS in, 10 kHz

Digital Inputs to IFB Output, Pin 2:

THD+N: 0.07% (-63 dB), +4 dBu input, 1 kHz

Frequency Response: ±1 dB, 100 Hz to 20 kHz

Signal-to-Noise Ratio (A Weighted): 64 dB

Dynamic Range: 84 dB

Digital Inputs to IFB Output, Pin 3:

THD+N: 0.03% (-71 dB), +4 dBu input, 1 kHz

Frequency Response: ±1 dB, 20 Hz to 20 kHz

Signal-to-Noise Ratio (A Weighted): 70 dB

Dynamic Range: 90 dB

IFB Output:

Type: DC power with two channels of unbalanced audio

Connections: common on pin 1, DC (+28 V nominal) modulated with channel 1 audio (-10 dBu nominal) on pin 2, channel 2 audio (-10 dBu nominal) on pin 3

Maximum Audio Output Level:

Pin 2: +9 dBu with +23 dBu on audio input

Pin 3: +10 dBu with +24 dBu on audio input

DC Current Output: 120 mA maximum

Output Impedance: 200 ohms, nominal

Meters: 2, 7-segment LED, modified VU ballistics

Connectors:

Line and IFB Outputs: 3, 3-pin male XLR

AES3 Digital Audio Input: 1, DIN 1.0/2.3-compliant coaxial

Analog Audio Inputs: 1, 5-position male header (refer to Appendix A in the User Guide for mating connector details)

DC Input/Data: 1, 4-position male header (refer to Appendix A in the User Guide for mating connector details)

Power Requirement: 12 volts DC nominal, 600 mA max; acceptable range 10-18 volts DC, 700 mA max at 10 volts

Dimensions (Overall):

3.75 inches wide (9.5 cm)

1.69 inches high (4.3 cm)

2.30 inches deep (5.8 cm)

Mounting: requires custom implementation; no mounting method provided (refer to Appendix B in the User Guide for details)

Weight: 0.2 pounds (91 g)

Specifications subject to change without notice.

Studio Technologies, Inc.

Skokie, Illinois USA

www.studio-tech.com