




Model 44D

AUDIO INTERFACE

Configuration Guide

This Configuration Guide is applicable for serial numbers
M44D-01151 and later
with application firmware 1.3 and later and
Dante® firmware 2.0.0 (Ultimo 3.10.1.12) and later

Also applicable to units with serial numbers
M44D-00151 to 00250

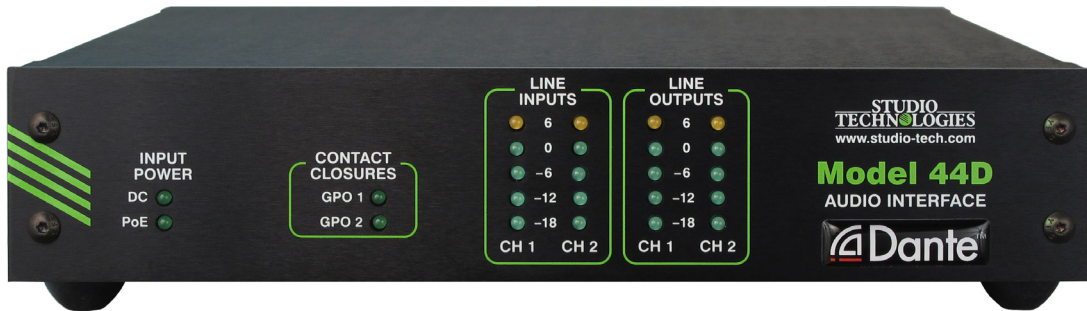

“Original” Model 44D back panel with serial numbers 00151-00250 (upper);
“Updated” Model 44D back panel with serial numbers 01151-later (lower)

SW1 – Line Input Nominal Level



+4 dBu (SMPTE, +4 dBu = -20 dBFS)



0 dBu (EBU, 0 dBu = -18 dBFS)

SW2 – Line Output Nominal Level



+4 dBu (SMPTE, +4 dBu = -20 dBFS)



0 dBu (EBU, 0 dBu = -18 dBFS)

SW3 – 10 kHz Low-Pass Filter



Disabled



Enabled

SW4 – Spare (Not Used)

