




Model 44D

AUDIO INTERFACE

Configuration Guide

This Configuration Guide is applicable for the following serial numbers: M44D-00151 to 00210 with application firmware 1.2 and later and Dante firmware 1.3 (Ultimo 2.2.3.1) and later

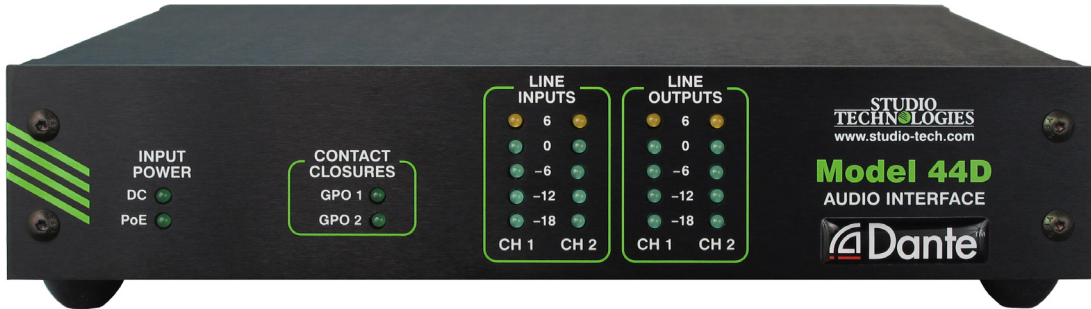

SW1 – Analog Inputs Maximum Level



+24 dBu = 0 dBFS



+18 dBu = 0 dBFS

SW2 – Analog Outputs Maximum Level



0 dBFS = +24 dBu



0 dBFS = +18 dBu

SW3 – 10 kHz Low-Pass Filter



Disabled



Enabled

SW4 – Spare (Not Used)

