



Rack Mounting the Model 545DR Intercom Interface

Panel Cutout or Surface Mounting One Model 545DR Unit

Installation kit RMBK-10 allows one Model 545DR to be mounted in a panel cutout or onto a flat surface. The kit contains two standard-length brackets and four 6-32 thread-pitch Phillips-head machine screws.


Get ready to install the kit by first removing the four machine screws and associated “bump on” protectors from the bottom of the Model 545DR’s chassis. They are removed using a #1 Phillips screwdriver. Store the four machine screws and four bump on protectors for possible later use.

To prepare the unit to mount in a cutout or other opening in a panel, use a #2 Phillips screwdriver and two 6-32 machine screws to attach one of the standard-length brackets onto the left side (when viewed from the front) of the Model 545DR’s enclosure. Orient the standard-length bracket such that its front is parallel to the Model 545DR’s front panel. The screws will mate with the threaded fasteners that can be seen on the side of the Model 545DR’s enclosure, near the front of the unit. Using two additional 6-32 machine screws, attach the other standard-length bracket onto the right side of the Model 545DR’s enclosure.

Once the two standard-length brackets have been installed the Model 545DR will be ready to be mounted into an opening. Secure the unit into the top left and right edges of the opening using two mounting screws per side.

To prepare the unit to be mounted onto a flat surface simply requires the standard-length brackets be attached to the Model 545DR at 90 degrees from how they are mounted for use in a panel cutout. Use a #2 Phillips screwdriver and two 6-32 machine screws to attach one of the standard-length brackets onto the left side (when viewed from the front) of the enclosure. Orient the bracket such that its front is parallel with the top surface of the Model 545DR’s enclosure. The screws will mate with the threaded fasteners that can be seen on the side of the Model 545DR’s enclosure, near the front of the unit. Following the same orientation, use two additional 6-32 machine screws to attach the other standard-length bracket onto the right side of the Model 545DR’s enclosure.

Once the two standard-length brackets have been installed the Model 545DR will be ready to be mounted onto a flat surface. Secure the unit to the surface using two mounting screws per side.

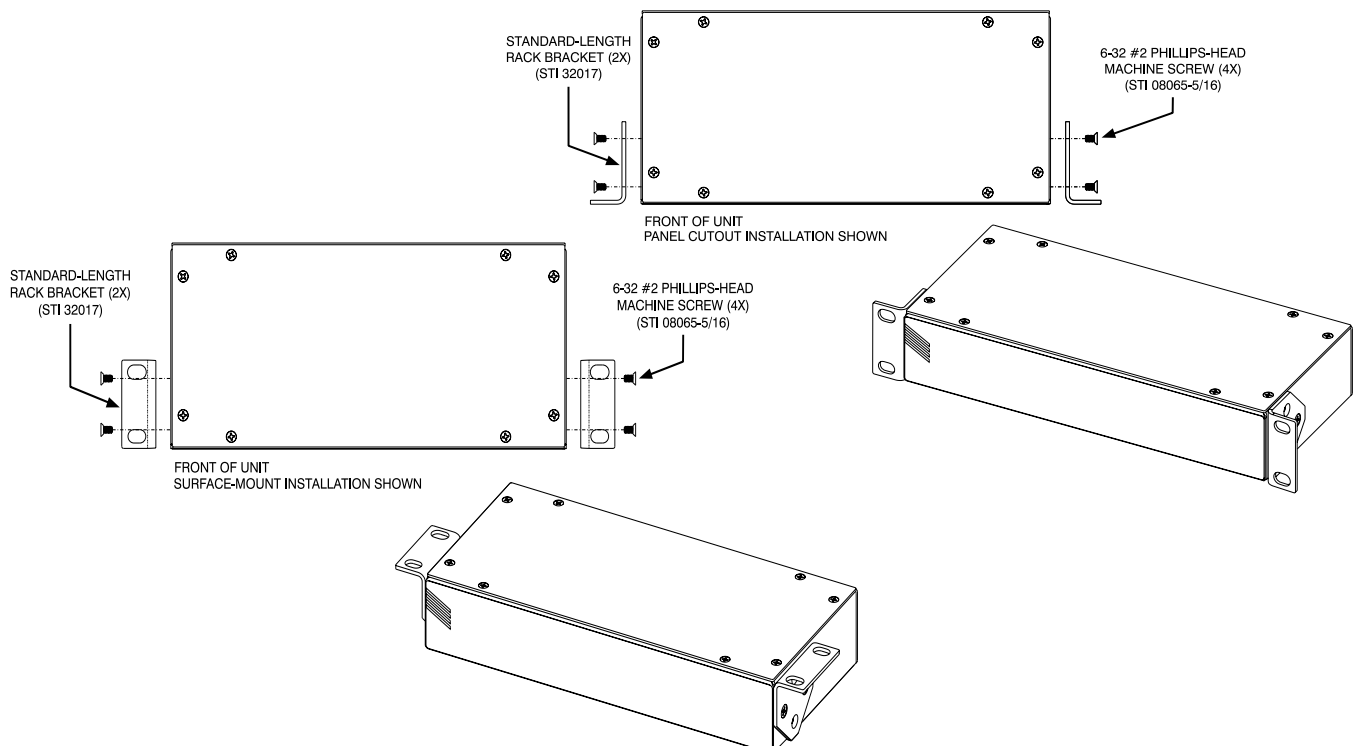

Left- or Right-Side Rack Mounting One Model 545DR Unit

Installation kit RMBK-11 allows one Model 545DR to be mounted in the left or right side of one space (1U) of a standard 19-inch rack enclosure. The kit contains one standard-length bracket, one long-length bracket, and four 6-32 thread-pitch Phillips-head machine screws.



Get ready to install the kit by removing the four machine screws and associated bump on protectors from the bottom of the Model 545DR's chassis. They are removed using a #1 Phillips screwdriver. Store the four machine screws and four bump on protectors for possible later use.

To prepare the unit to mount in the left side of a rack enclosure, use a #2 Phillips screwdriver and two 6-32 machine screws to attach the standard-length bracket onto the left side (when viewed from the front) of the

enclosure. The screws will mate with the threaded fasteners that can be seen on the side of the Model 545DR's enclosure, near the front of the unit. Using two additional 6-32 machine screws, attach the long-length bracket onto the right side of the Model 545DR's enclosure.

To prepare the unit to mount in the right side of a rack enclosure, use a #2 Phillips screwdriver and two 6-32 machine screws to attach the long-length bracket onto the left side of the enclosure. Using two additional 6-32 machine screws, attach the standard-length bracket onto the right side of the Model 545DR's enclosure.

Once the standard-length and long-length brackets have been installed the Model 545DR will be ready to be mounted into the designated equipment rack. One space (1U or 1.75 vertical inches) in a standard 19-inch equipment rack is required. Secure the unit into the equipment rack using two mounting screws per side.

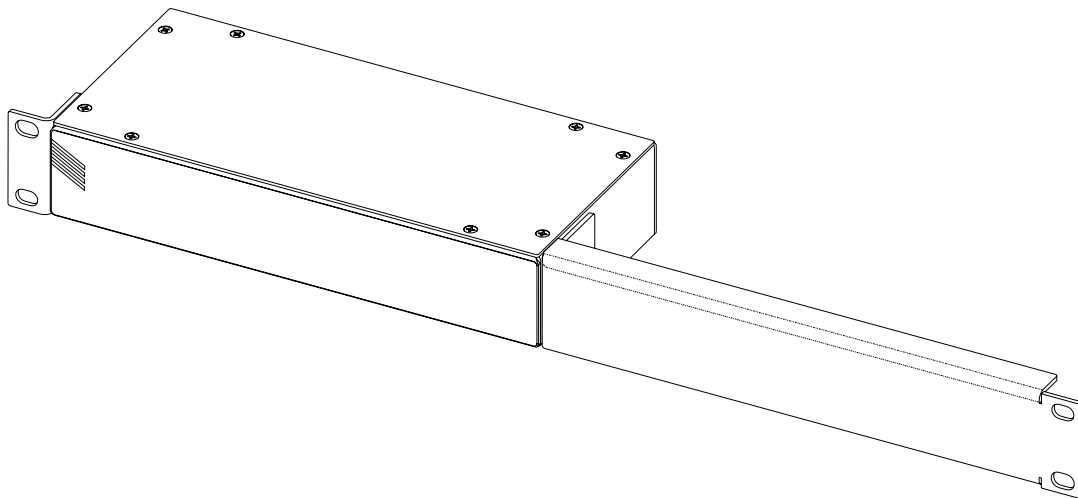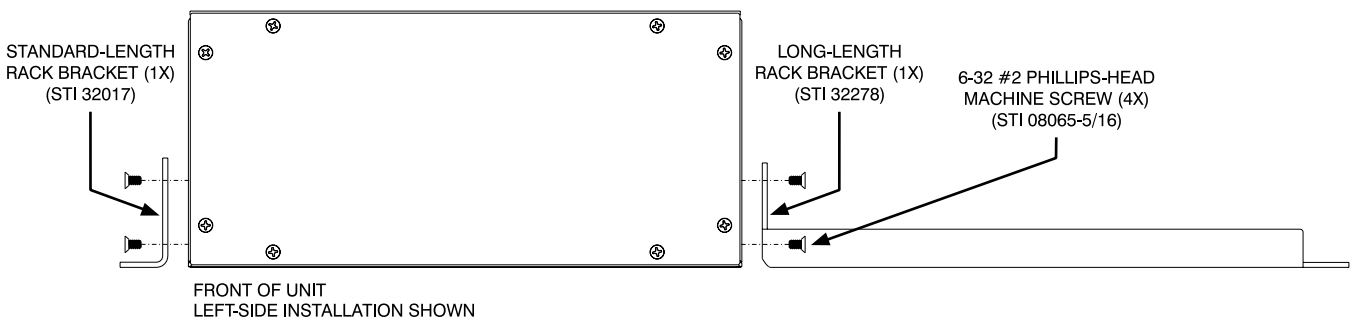

Center Rack Mounting One Model 545DR Unit



Installation kit RMBK-13 allows one Model 545DR to be mounted in the center of one space (1U) of a standard 19-inch rack enclosure. The kit contains two medium-length brackets and four 6-32 thread-pitch Phillips-head machine screws.

Get ready to install the kit by removing the four machine screws and associated bump on protectors from the bottom of the Model 545DR's chassis. They are removed using a #1 Phillips screwdriver. Store the four machine screws and four bump on protectors for possible later use.

To prepare the unit to mount in the center of a rack enclosure, use a #2 Phillips screwdriver and two 6-32 machine

screws to attach one of the medium-length brackets onto the left side (when viewed from the front) of the enclosure. The screws will mate with the threaded fasteners that can be seen on the side of the Model 545DR's enclosure, near the front of the unit. Using two additional 6-32 machine screws, attach the other medium-length bracket onto the right side of the Model 545DR's enclosure.

Once the two medium-length brackets have been installed the Model 545DR will be ready to be mounted into the designated equipment rack. One space (1U or 1.75 vertical inches) in a standard 19-inch equipment rack is required. Secure the unit into the equipment rack using two mounting screws per side.

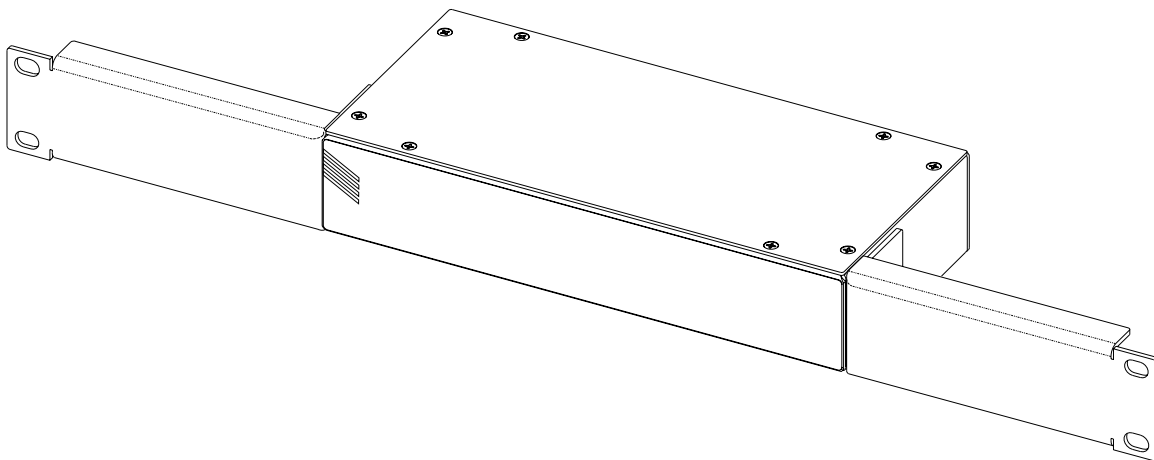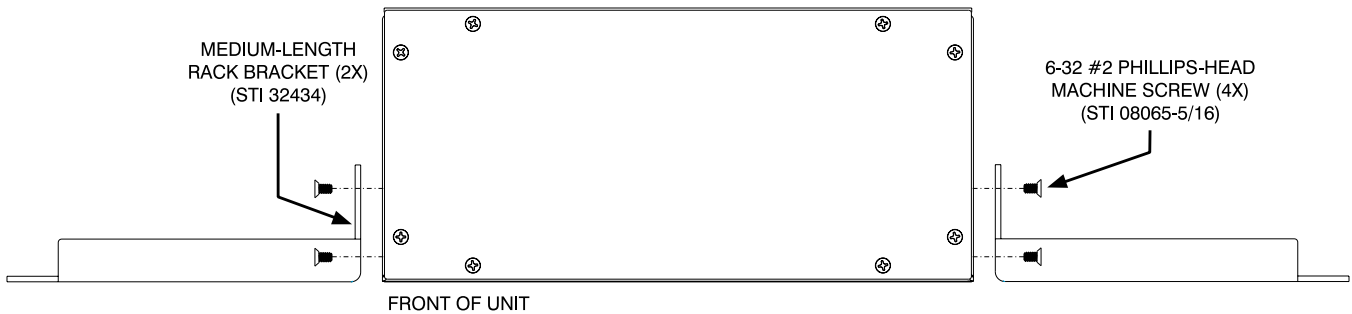

Studio Technologies, Inc.

Skokie, Illinois USA

© by Studio Technologies, Inc., December 2022

studio-tech.com